WAECO
mobile solutions

MyFridge MF-6W

D	4	**Weinkühlschrank** Bedienungsanleitung
GB	11	**Wine refrigerator** Instruction Manual
F	18	**Réfrigérateur à vin** Notice d'utilisation
E	25	**Nevera para vino** Instrucciones de uso
I	32	**Frigorifero per vino** Istruzioni per l'uso
NL	39	**Wijnkoelkast** Gebruiksaanwijzing
DK	46	**Vinkøleskab** Betjeningsvejledning
S	53	**Vinkylare** Bruksanvisning
N	59	**Vinkjøler** Bruksanvisning
FIN	65	**Viinijääkaappi** Käyttöohje

1

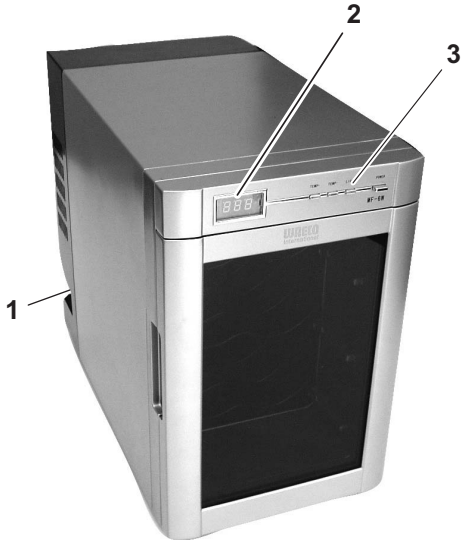

2

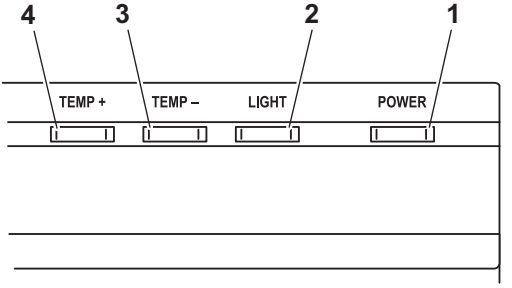

3

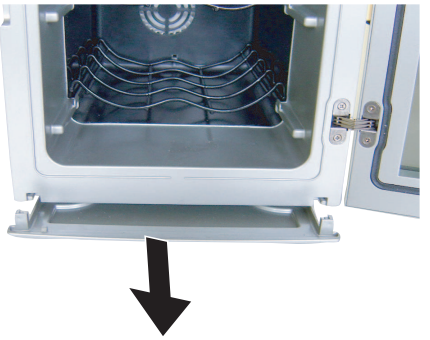

Please read this operating manual carefully before starting the machine. Keep it in a safe place for future reference. If the device is resold, this operating manual must be handed over to the purchaser along with the device.

Contents

1 Notes on using the operating manual 11
2 Safety instructions 12
3 Scope of delivery 13
4 Intended use 13
5 Technical description 13
6 Using the wine refrigerator 14
7 Cleaning and maintenance 16
8 Guarantee 16
9 Disposal 16
10 Technical data 17

1 Notes on using the operating manual

The following symbols are used in this operating manual:

Caution!
Safety instruction: failure to observe this instruction can cause injury or damage the device.

Caution!
Safety instruction relating to a danger from an electrical current or voltage. Failure to observe this instruction can damage the device and impair its function and cause injury.

Note
Supplementary information for operating the device.

➤ **Action:** this symbol indicates that action is required on your part. The required action is described step-by-step.

✓ This symbol indicates the result of an action.

2 1, page 3: this refers to an element in an illustration. In this example, item 1 in figure **2** on page 3.

Please observe the following safety instructions.

2 Safety instructions

Caution!
WAECO International will not be held liable for claims for damage resulting from the following:

– Damage to the device resulting from mechanical influences and overvoltage
– Alterations to the device made without the explicit permission of WAECO International
– Use for purposes other than those described in the operating manual

2.1 General safety

- Do not operate the device if it is visibly damaged.
- Only connect the device as follows:
  – With the mains adapter supplied to the 100-240 V AC mains
  – With the 12 V lead supplied to a 12 V socket
- This device may only be repaired by qualified personnel. Inadequate repairs can lead to considerable hazards. For repair service, please contact the service centre in your country (addresses on the rear side).
- Set up the device in a dry location where it is protected against splashing water.
- Do not place the device near naked flames or other heat sources (heaters, direct sunlight, gas ovens etc.).
- Ensure that the ventilation slots are not covered.
- The device is not suitable for storing caustic materials or materials containing solvents.

- Before you start up the device for the first time, verify that the operating voltage matches the mains voltage (see type plate).
- If the connection cable is damaged, it must be replaced to prevent possible electrical hazards. Only replace a damaged connection cable with a connection cable of the same type and specifications.

2.2 Operating the device safely

- Electronic devices are not toys.
  Always keep and use the device out of the reach of children.
- Protect the device against rain and moisture.

3 Scope of delivery

Quantity	Description
1	Wine refrigerator
1	Mains cable with adapter
1	12 V DC cable
1	Operating manual
3	Wine rack

4 Intended use

The wine refrigerator is designed to keep up to six retail bottles of wine (up to a length of 32 cm/12.5 inch) cool (max. 18 °C (64 °F) under ambient temperature).

5 Technical description

The wine refrigerator is designed to be operated from a 100-240 V mains connection or a 12 V socket.

Two buttons allow you to set the desired temperature within a range from +5 °C (40 °F) to +20 °C (68 °F). A display shows both the desired and the current cooling temperature. The interior light can be switched on as needed.

All materials used in the wine refrigerator are compatible for use with foodstuffs. The refrigerant circuit is maintenance-free and CFC-free.

The wine refrigerator has the following control elements:

No. in 1, page 3	Explanation
1	Electrical power connection
2	Display
3	Buttons

The wine refrigerator has the following buttons:

No. in 1, page 3	Description	Explanation
1	POWER	Switches the wine refrigerator on or off.
2	LIGHT	Switches the interior light on or off.
3	TEMP –	Decreases the desired cooling temperature by 1 °C (2 °F).
4	TEMP +	Increases the desired cooling temperature by 1 °C (2 °F).

Note
You can switch the temperature display between Celsius and Fahrenheit. To do this, press the **TEMP +** and **TEMP -** buttons simultaneously for three seconds.

6 Using the wine refrigerator

Before you switch on your new wine refrigerator for the first time, you should clean it inside and outside with a damp cloth for hygienic reasons (please also refer to the the “Cleaning and maintenance” chapter on page 16).

6.1 Energy saving tips

- Select a well-ventilated location for the device.
- Do not open the wine refrigerator more often than necessary.
- Do not leave the door open for longer than necessary.

6.2 Connecting the wine refrigerator

Danger of fatal injuries!
Never handle plugs and switches if you have wet hands.

➤ Before you start up the device for the first time, verify that the operating voltage matches the mains voltage (see type plate).

➤ Connect the device as follows:
- With the mains adapter supplied to the 100-240 V AC mains
- With the 12 V lead supplied to a 12 V socket

6.3 Using the wine refrigerator

Food may only be stored in its original packaging or in suitable containers.

➤ Switch the wine refrigerator on by pressing the “POWER” button (2 1, page 3).

✓ The display switches on and shows the current cooling temperature.

➤ Switch the wine refrigerator off by pressing the “POWER” button (2 1, page 3).

✓ The display switches off.

➤ If you wish to turn the interior light on or off, press the “LIGHT” button (2 2, page 3).

Setting the temperature

You can set the temperature within a range from +5 °C (40 °F) to +20 °C (68 °F).

The cooling capacity can be influenced by:
– The ambient temperature
– The number of wine bottles to be cooled
– The frequency with which the door is opened

➤ Press the “TEMP –” (2 3, page 3) button to **decrease** the desired cooling temperature by 1 °C (2 °F), or press the “TEMP +” (2 4, page 3) button to **increase** the desired cooling temperature by 1 °C (2 °F).

✓ The cooling temperature set at °C or F° then appears in the display for a few seconds.

7 Cleaning and maintenance

Caution!
Do not use abrasive cleaning agents or hard objects during cleaning as these can damage the wine refrigerator.

➤ As soon as the wine refrigerator becomes dirty, clean it with a damp cloth.

The interior racks can be removed to facilitate cleaning.

➤ Make sure that no water drips into the sealing. This can damage the electronics.

➤ Wipe the wine refrigerator dry with a cloth after cleaning.

➤ Regularly empty the condensation trap on the bottom of the device. To do this, open the door and pull the condensation trap completely out of the device (3, page 3).

8 Guarantee

Our general guarantee conditions apply. If the product is defective, please return it to the service centre in your country (addresses on the back of the instruction manual) or to your specialist dealer. For repair and guarantee processing, the following documents must be sent along with the device:

- A copy of the receipt with purchasing date
- A reason for the claim or description of the fault

9 Disposal

➤ Place the packaging material in the appropriate recycling waste bins wherever possible.

If you wish to finally dispose of the device, ask your local recycling centre or specialist dealer for details about how to do this in accordance with the applicable disposal regulations.

10 Technical data

Capacity:	18 litres
Connection voltage:	12 V DC 100 to 240 V AC (with rectifier)
Average power consumption:	48 W
Cooling temperature range:	+5 °C (40 °F) to +20 °C (68 °F)
Dimensions (W x H x D):	260 x 415 x 470 mm
Weight:	approx. 7.2 kg
Testing/certification:	

Versions, technical modifications and delivery options reserved.

This device is CFC-free.

WAECO
mobile solutions

Headquarters

(D) **WAECO International GmbH** · Hollefeldstraße 63 · D-48282 Emsdetten
☎ +49 2572 879-195 · 🖷 +49 2572 879-322 · Mail: info@waeco.de · Internet: www.waeco.de

Europe

(A) **WAECO Austria GmbH**
Neudorferstrasse 108
2353 Guntramsdorf
☎ +43 2236 908070
🖷 +43 2236 90807060
Mail: info@waeco.at

(CH) **WAECO Schweiz AG**
Riedackerstrasse 7a
CH-8153 Rümlang (Zürich)
☎ +41 44 8187171
🖷 +41 44 8187191
Mail: info@waeco.ch

(DK) **WAECO Danmark A/S**
Tværvej 2
DK-6640 Lunderskov
☎ +45 75585966
🖷 +45 75586307
Mail: info@waeco.dk

(E) **WAECO Ibérica S.A.**
Camí del Mig, 106
Poligono Industrial Les Corts
E-08349 Cabrera de Mar
(Barcelona)
☎ +34 93 7502277
🖷 +34 93 7500552
Mail: info@waeco.es

(F) **WAECO Distribution SARL**
ZAC 2 · Les Portes de L'Oise
Rue Isaac Newton
F-60230 Chambly (Paris)
☎ +33 1 30282020
🖷 +33 1 30282010
Mail: info@waeco.fr

(FIN) **WAECO Finland OY**
Mestarintie 4
FIN-01730 Vantaa
☎ +358 20 7413220
🖷 +358 9 7593700
Mail: waeco@waeco.fi

(I) **WAECO Italcold SRL**
Via dell'Industria 4/0
I-40012 Calderara di Reno (BO)
☎ +39 051 4148411
🖷 +39 051 4148412
Mail: sales@waeco.it

(N) **WAECO Norge AS**
Leif Weldingsvei 16
N-3208 Sandefjord
☎ +47 33428450
🖷 +47 33428459
Mail: firmapost@waeco.no

(NL) **WAECO Benelux B.V.**
Ecustraat 3
NL-4879 NP Etten-Leur
☎ +31 76 5029000
🖷 +31 76 5029090
Mail: verkoop@waeco.nl

(S) **WAECO Svenska AB**
Gustaf Melins gata 7
S-42131 Västra Frölunda
(Göteborg)
☎ +46 31 7341100
🖷 +46 31 7341101
Mail: info@waeco.se

(UK) **WAECO UK Ltd.**
Dorset DT2 8LY · Unit G1
Roman Hill Business Park
UK-Broadmayne
☎ +44 1305 854000
🖷 +44 1305 854288
Mail: sales@waeco.co.uk

Overseas + Middle East

(AUS) **WAECO Pacific Pty. Ltd.**
1 John Duncan Court
Varsity Lakes QLD 4227
☎ +61 7 55076000
🖷 +61 7 55076001
Mail: sales@waeco.com.au

(HK) **WAECO Impex Ltd.**
Suites 3210-12 · 32/F · Tower 2
The Gateway · 25 Canton Road
Tsim Sha Tsui · Kowloon
Hong Kong
☎ +852 24632750
🖷 +852 24639067
Mail: info@waeco.com.hk

(ROC) **WAECO Impex Ltd.**
Taipei Office
2 FL-3 · No. 56 Tunhua South Rd, Sec 2
Taipei 106, Taiwan
☎ +886 2 27014090
🖷 +886 2 27060119
Mail: marketing@waeco.com.tw

(UAE) **WAECO Middle East FZCO**
R/A 8, SD 6
Jebel Ali, Dubai
☎ +971 4 8833858
🖷 +971 4 8833868
Mail: waeco@emirates.net.ae

4445100111 09/2007

www.waeco.com